


An Introduction Into OpenMP


Ruud van der Pas

Senior Staff Engineer
Scalable Systems Group
Sun Microsystems

IWOMP 2005
University of Oregon
Eugene, Oregon, USA
June 1-4, 2005




The OpenMP Programming Model




Outline

- *The OpenMP Programming Model*
- *OpenMP Guided Tour*
- *OpenMP Overview*
 - *Clauses*
 - *Worksharing constructs*
 - *Synchronization constructs*
 - *Environment variables*
 - *Global Data*
 - *Runtime functions*
- *Wrap-up*





OpenMP™

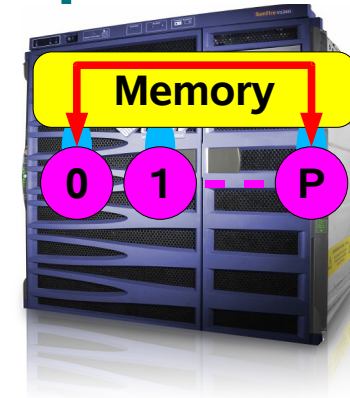

Shared Memory Model

5

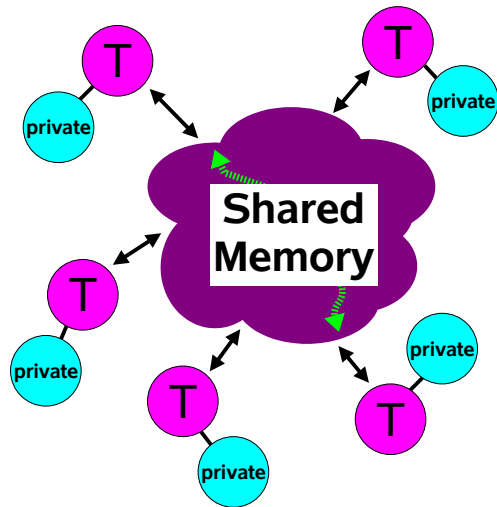



Programming Model

- ✓ All threads have access to the same, globally shared, memory
- ✓ Data can be shared or private
- ✓ Shared data is accessible by all threads
- ✓ Private data can be accessed only by the threads that owns it
- ✓ Data transfer is transparent to the programmer
- ✓ Synchronization takes place, but it is mostly implicit


The OpenMP execution model

7

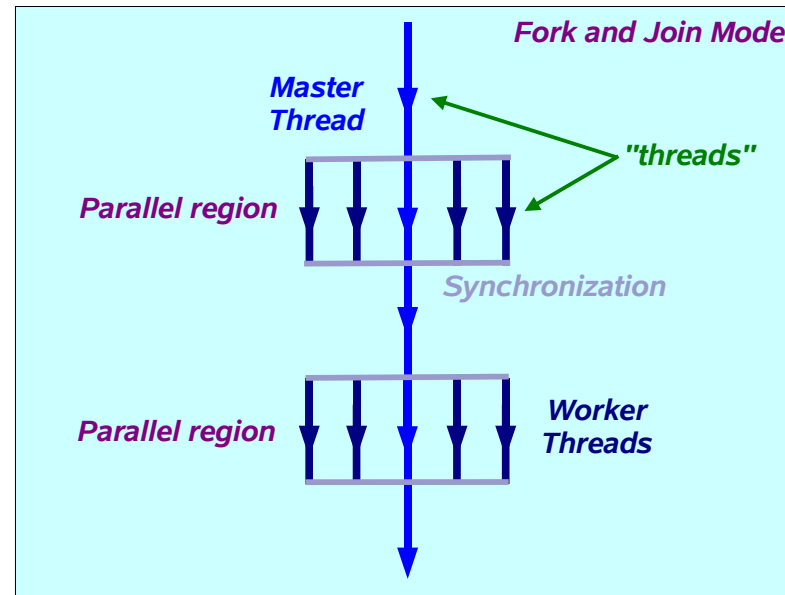

About Data

6




◆ In a shared memory parallel program variables have a "label" attached to them:

- ☞ Labelled "Private" ↗ Visible to one thread only
 - ✓ Change made in local data, is not seen by others
 - ✓ Example - Local variables in a function that is executed in parallel
- ☞ Labelled "Shared" ↗ Visible to all threads
 - ✓ Change made in global data, is seen by all others
 - ✓ Example - Global data

Example - Matrix times vector

8



```
#pragma omp parallel for default(none) \
    private(i,j,sum) shared(m,n,a,b,c)
for (i=0; i<m; i++)
{
    sum = 0.0;
    for (j=0; j<n; j++)
        sum += b[i][j]*c[j];
    a[i] = sum;
}
```


TID = 0

TID = 1


```
for (i=0,1,2,3,4)
i = 0
sum = Σ b[i=0][j]*c[j]
a[0] = sum
i = 1
sum = Σ b[i=1][j]*c[j]
a[1] = sum
```

```
for (i=5,6,7,8,9)
i = 5
sum = Σ b[i=5][j]*c[j]
a[5] = sum
i = 6
sum = Σ b[i=6][j]*c[j]
a[6] = sum
```

... etc ...




OpenMP Guided Tour



When to consider using OpenMP?

- *The compiler may not be able to do the parallelization in the way you like to see it:*
 - *A loop is not parallelized*
 - ✓ *The data dependency analysis is not able to determine whether it is safe to parallelize or not*
 - *The granularity is not high enough*
 - ✓ *The compiler lacks information to parallelize at the highest possible level*
- *This is when explicit parallelization through OpenMP directives and functions comes into the picture*




OpenMP™

<http://www.openmp.org>

OMP
Community


<http://www.compunity.org>



About OpenMP


- *The OpenMP programming model is a powerful, yet compact, de-facto standard for Shared Memory Programming*
- *Languages supported: Fortran and C/C++*
- *Current release of the standard: 2.5*
 - *Specifications released May 2005*
- *We will now present an overview of OpenMP*
- *Many details will be left out*
- *For specific information, we refer to the OpenMP language reference manual (<http://www.openmp.org>)*

Terminology




- **OpenMP Team := Master + Workers**
- **A Parallel Region is a block of code executed by all threads simultaneously**
 - ☞ *The master thread always has thread ID 0*
 - ☞ *Thread adjustment (if enabled) is only done before entering a parallel region*
 - ☞ *Parallel regions can be nested, but support for this is implementation dependent*
 - ☞ *An "if" clause can be used to guard the parallel region; in case the condition evaluates to "false", the code is executed serially*
- **A work-sharing construct divides the execution of the enclosed code region among the members of the team; in other words: they split the work**

Components of OpenMP



Directives	Environment variables	Runtime environment
<ul style="list-style-type: none"> ◆ Parallel regions ◆ Work sharing ◆ Synchronization ◆ Data scope attributes <ul style="list-style-type: none"> ☞ <i>private</i> ☞ <i>firstprivate</i> ☞ <i>lastprivate</i> ☞ <i>shared</i> ☞ <i>reduction</i> ◆ Orphaning 	<ul style="list-style-type: none"> ◆ Number of threads ◆ Scheduling type ◆ Dynamic thread adjustment ◆ Nested parallelism 	<ul style="list-style-type: none"> ◆ Number of threads ◆ Thread ID ◆ Dynamic thread adjustment ◆ Nested parallelism ◆ Timers ◆ API for locking

A loop parallelized with OpenMP




```
#pragma omp parallel default(none) \
    shared(n,x,y) private(i)
{
    #pragma omp for
    for (i=0; i<n; i++)
        x[i] += y[i];
} /*-- End of parallel region --*/
```

clauses


```
!$omp parallel default(none) &
!$omp shared(n,x,y) private(i)
!$omp do
    do i = 1, n
        x(i) = x(i) + y(i)
    end do
!$omp end do
!$omp end parallel
```

Directive format



- **C: directives are case sensitive**
 - **Syntax:** #pragma omp directive [clause [clause] ...]
 - **Continuation: use | in pragma**
 - **Conditional compilation: `_OPENMP` macro is set**
-
- **Fortran: directives are case insensitive**
 - **Syntax:** sentinel directive [clause [,] clause]...
 - **The sentinel is one of the following:**
 - ✓ `!$OMP` or `C$OMP` or `*$OMP` (fixed format)
 - ✓ `!$OMP` (free format)
 - **Continuation: follows the language syntax**
 - **Conditional compilation: `!$` or `C$` -> 2 spaces**

A more elaborate example




```
#pragma omp parallel if (n>limit) default(none) \
  shared(n,a,b,c,x,y,z) private(f,i,scale)
{
  f = 1.0;
  #pragma omp for nowait
  for (i=0; i<n; i++)
    z[i] = x[i] + y[i];
  #pragma omp for nowait
  for (i=0; i<n; i++)
    a[i] = b[i] + c[i];
  #pragma omp barrier
  ....
  scale = sum(a,0,n) + sum(z,0,n) + f;
  ....
} /*-- End of parallel region --*/
```

Annotations:

- Statement is executed by all threads (points to `f = 1.0;` and `scale = ...`)
- parallel loop (work will be distributed) (points to the two `for` loops)
- parallel region (points to the entire code block)
- synchronization (points to `#pragma omp barrier`)


OpenMP performance

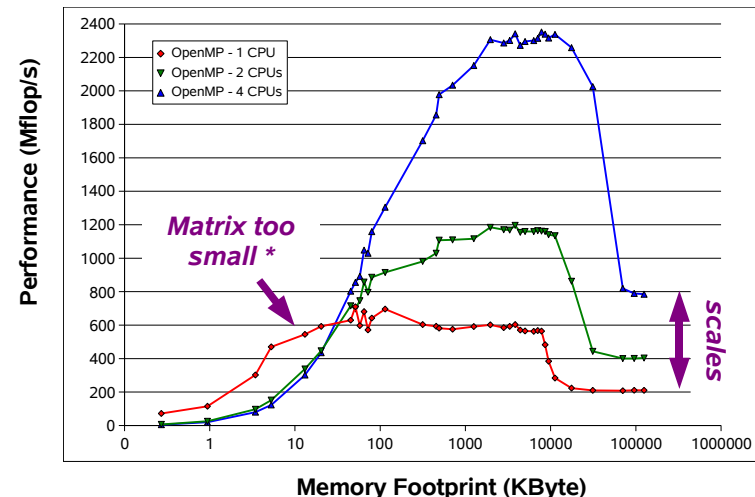

SunFire 6800
UltraSPARC III Cu @ 900 MHz
8 MB L2-cache

*) With the IF-clause in OpenMP this performance degradation can be avoided

Another OpenMP example




```
1 void mxv_row(int m,int n,double *a,double *b,double *c)
2 {
3   int i, j;
4   double sum;
5
6   #pragma omp parallel for default(none) \
7     private(i,j,sum) shared(m,n,a,b,c)
8   for (i=0; i<m; i++)
9   {
10    sum = 0.0;
11    for (j=0; j<n; j++)
12      sum += b[i*n+j]*c[j];
13    a[i] = sum;
14  } /*-- End of parallel for --*/
15 }
```

```
% cc -c -fast -xrestrict -xopenmp -xloopinfo mxv_row.c
"mxv_row.c", line 8: PARALLELIZED, user pragma used
"mxv_row.c", line 11: not parallelized
```

Some OpenMP Clauses




About OpenMP clauses




- Many OpenMP directives support clauses
- These clauses are used to specify additional information with the directive
- For example, *private(a)* is a clause to the *for* directive:
 - **#pragma omp for private(a)**
- Before we present an overview of all the directives, we discuss several of the OpenMP clauses first
- The specific clause(s) that can be used, depends on the directive

About storage association



- Private variables are undefined on entry and exit of the parallel region
- The value of the original variable (before the parallel region) is undefined after the parallel region !
- A private variable within a parallel region has no storage association with the same variable outside of the region
- Use the *first/last private* clause to override this behaviour
- We will illustrate these concepts with an example

The if/private/shared clauses



if (scalar expression)

- ✓ Only execute in parallel if expression evaluates to true
- ✓ Otherwise, execute serially

```
#pragma omp parallel if (n > threshold) \
  shared(n,x,y) private(i)
{
  #pragma omp for
  for (i=0; i<n; i++)
    x[i] += y[i];
} /*-- End of parallel region --*/
```


private (list)

- ✓ No storage association with original object
- ✓ All references are to the local object
- ✓ Values are undefined on entry and exit

shared (list)

- ✓ Data is accessible by all threads in the team
- ✓ All threads access the same address space

Example private variables



```
main()
{
  A = 10;

  #pragma omp parallel
  {
    #pragma omp for private(i) firstprivate(A) lastprivate(B) ...
    for (i=0; i<n; i++)
    {
      ....
      B = A + i;
      ....
    }


    C = B;
  } /*-- End of OpenMP parallel region --*/
}
```

/*-- A undefined, unless declared firstprivate --*/

/*-- B undefined, unless declared lastprivate --*/

The first/last private clauses

25



firstprivate (list)


- ✓ All variables in the list are initialized with the value the original object had before entering the parallel construct

lastprivate (list)

- ✓ The thread that executes the sequentially last iteration or section updates the value of the objects in the list

The reduction clause - example

27



```


sum = 0.0
!$omp parallel default(none) &
!$omp shared(n,x) private(i)
!$omp do reduction (+:sum)
  do i = 1, n
    sum = sum + x(i)
  end do
!$omp end do
!$omp end parallel
print *,sum
    
```

Variable SUM is a shared variable

- ☞ Care needs to be taken when updating shared variable SUM
- ☞ With the reduction clause, the OpenMP compiler generates code such that a race condition is avoided

The default clause

26



default (none | shared | private)

default (none | shared)

none

- ✓ No implicit defaults
- ✓ Have to scope all variables explicitly

shared

- ✓ All variables are shared
- ✓ The default in absence of an explicit "default" clause

private

- ✓ All variables are private to the thread
- ✓ Includes common block data, unless THREADPRIVATE


Fortran

C/C++

Note: default(private) is not supported in C/C++

The reduction clause

28



reduction ([operator | intrinsic]) : list)

Fortran

reduction (operator : list)

C/C++

- ✓ Reduction variable(s) must be shared variables
- ✓ A reduction is defined as:

Fortran


C/C++

<code>x = x operator expr</code>	<code>x = x operator expr</code>
<code>x = expr operator x</code>	<code>x = expr operator x</code>
<code>x = intrinsic (x, expr_list)</code>	<code>x++, ++x, x--, --x</code>
<code>x = intrinsic (expr_list, x)</code>	<code>x <binop> = expr</code>

Check the docs for details

- ✓ Note that the value of a reduction variable is undefined from the moment the first thread reaches the clause till the operation has completed
- ✓ The reduction can be hidden in a function call

The nowait clause




- To minimize synchronization, some OpenMP directives/pragmas support the optional **nowait** clause
- If present, threads will not synchronize/wait at the end of that particular construct
- In Fortran the **nowait** is appended at the closing part of the construct
- In C, it is one of the clauses on the pragma

```
#pragma omp for nowait
{
    :
}
```

```
!$omp do
    :
    :
!$omp end do nowait
```


The parallel region - clauses



A parallel region supports the following clauses:

if	(scalar expression)	
private	(list)	
shared	(list)	
default	(none shared)	(C/C++)
default	(none shared private)	(Fortran)
reduction	(operator: list)	
copyin	(list)	
firstprivate	(list)	
num_threads	(scalar_int_expr)	


The parallel region



A parallel region is a block of code executed by multiple threads simultaneously

```
#pragma omp parallel [clause[[],] clause] ...]
{
    "this will be executed in parallel"
} (implied barrier)
```

```
!$omp parallel [clause[[],] clause] ...]
    "this will be executed in parallel"
!$omp end parallel (implied barrier)
```



Worksharing Directives

Work-sharing constructs

The OpenMP work-sharing constructs

<pre>#pragma omp for { } !\$OMP DO !\$OMP END DO</pre>	<pre>#pragma omp sections { } !\$OMP SECTIONS !\$OMP END SECTIONS</pre>	<pre>#pragma omp single { } !\$OMP SINGLE !\$OMP END SINGLE</pre>
---	--	--

- ☞ The work is distributed over the threads
- ☞ Must be enclosed in a parallel region
- ☞ Must be encountered by all threads in the team, or none at all
- ☞ No implied barrier on entry; implied barrier on exit (unless `nowait` is specified)
- ☞ A work-sharing construct does not launch any new threads

The omp for/do directive

The iterations of the loop are distributed over the threads

```
#pragma omp for [clause[[],] clause] ...]
  <original for-loop>
```

```
!$omp do [clause[[],] clause] ...]
  <original do-loop>
!$omp end do [nowait]
```

Clauses supported:

private	firstprivate
lastprivate	reduction
ordered*	schedule ← covered later
nowait	

*) Required if ordered sections are in the dynamic extent of this construct

The WORKSHARE construct

Fortran has a fourth worksharing construct:

```
!$OMP WORKSHARE
  <array syntax>
!$OMP END WORKSHARE [NOWAIT]
```

Example:


```
!$OMP WORKSHARE
  A(1:M) = A(1:M) + B(1:M)
!$OMP END WORKSHARE NOWAIT
```

The omp for directive - example


```
#pragma omp parallel default(none) \
  shared(n,a,b,c,d) private(i)
{
  #pragma omp for nowait
  for (i=0; i<n-1; i++)
    b[i] = (a[i] + a[i+1])/2;

  #pragma omp for nowait
  for (i=0; i<n; i++)
    d[i] = 1.0/c[i];

} /*-- End of parallel region --*/
  (implied barrier)
```

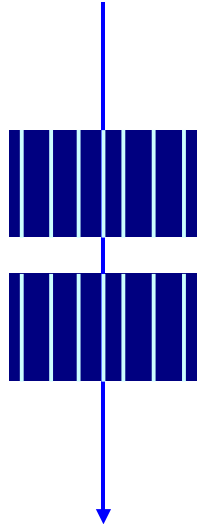


Load balancing



- Load balancing is an important aspect of performance
- For regular operations (e.g. a vector addition), load balancing is not an issue
- For less regular workloads, care needs to be taken in distributing the work over the threads
- Examples of irregular workloads:
 - Transposing a matrix
 - Multiplication of triangular matrices
 - Parallel searches in a linked list
- For these irregular situations, the **schedule clause** supports various iteration scheduling algorithms

The schedule clause/2



dynamic [, chunk]

- ✓ Fixed portions of work; size is controlled by the value of chunk
- ✓ When a thread finishes, it starts on the next portion of work


guided [, chunk]

- ✓ Same dynamic behaviour as "dynamic", but size of the portion of work decreases exponentially

runtime

- ✓ Iteration scheduling scheme is set at runtime through environment variable **OMP_SCHEDULE**

The schedule clause/1



schedule (static | dynamic | guided [, chunk])
 schedule (runtime)


static [, chunk]

- ✓ Distribute iterations in blocks of size "chunk" over the threads in a round-robin fashion
- ✓ In absence of "chunk", each thread executes approx. N/P chunks for a loop of length N and P threads


Example: Loop of length 16, 4 threads:

TID	0	1	2	3
no chunk	1-4	5-8	9-12	13-16
chunk = 2	1-2 9-10	3-4 11-12	5-6 13-14	7-8 15-16

The experiment




500 iterations on 4 threads

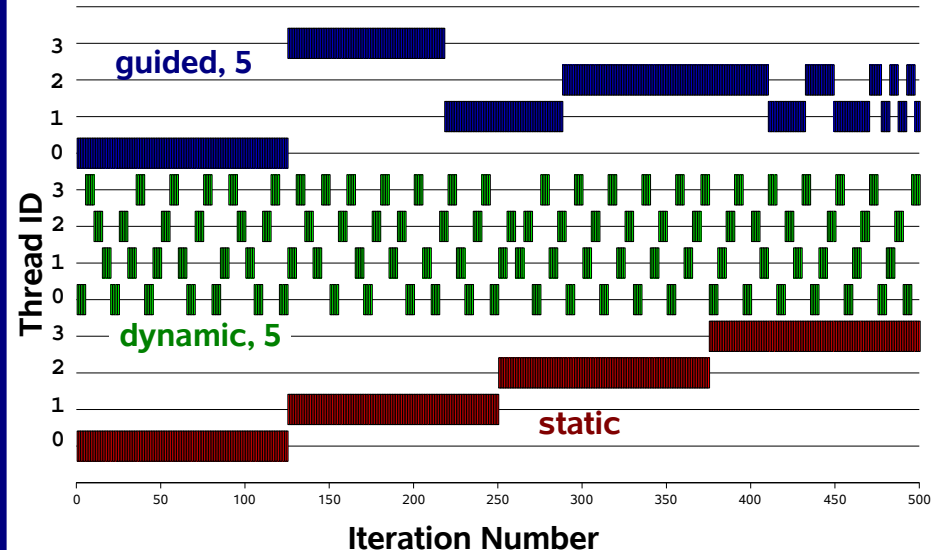

The SECTIONS directive

The individual code blocks are distributed over the threads



```
#pragma omp sections [clause(s)]
{
#pragma omp section
    <code block1>
#pragma omp section
    <code block2>
#pragma omp section
    :
}
```


```
!$omp sections [clause(s)]
!$omp section
    <code block1>
!$omp section
    <code block2>
!$omp section
    :
!$omp end sections [nowait]
```

Clauses supported:

- private
- lastprivate
- nowait
- firstprivate
- reduction


Note: The SECTION directive must be within the lexical extent of the SECTIONS/END SECTIONS pair

Short-cuts




<pre>#pragma omp parallel #pragma omp for for (...)</pre>		<pre>#pragma omp parallel for for (...)</pre>
<i>Single PARALLEL loop</i>		
<pre>!\$omp parallel !\$omp do ... !\$omp end do !\$omp end parallel</pre>		<pre>!\$omp parallel do ... !\$omp end parallel do</pre>
<i>Single PARALLEL sections</i>		
<pre>#pragma omp parallel #pragma omp sections { ... }</pre>		<pre>#pragma omp parallel sections { ... }</pre>
<i>Single WORKSHARE loop</i>		
<pre>!\$omp parallel !\$omp workshare ... !\$omp end workshare !\$omp end parallel</pre>		<pre>!\$omp parallel workshare ... !\$omp end parallel workshare</pre>

The sections directive - example




```
#pragma omp parallel default(none) \
    shared(n,a,b,c,d) private(i)
{
#pragma omp sections nowait
{
#pragma omp section
    for (i=0; i<n-1; i++)
        b[i] = (a[i] + a[i+1])/2;

#pragma omp section
    for (i=0; i<n; i++)
        d[i] = 1.0/c[i];
} /*-- End of sections --*/
} /*-- End of parallel region --*/
```




Orphaning



<pre>!\$omp parallel { call dowork() } !\$omp end parallel</pre>		<pre>subroutine dowork() { !\$omp do do i = 1, n } !\$omp end do</pre>
<i>orphaned work-sharing directive</i>		

- ♦ The OpenMP standard does not restrict worksharing and synchronization directives (omp for, omp single, critical, barrier, etc.) to be within the lexical extent of a parallel region. These directives can be orphaned
- ♦ That is, they can appear outside the lexical extent of a parallel region

More on orphaning




```
(void) dowork(); !- Sequential FOR

#pragma omp parallel
{
  (void) dowork(); !- Parallel FOR
}
```

```
void dowork()
{
  #pragma for
  for (i=0;....)
  {
    :
  }
}
```

- ◆ When an orphaned worksharing or synchronization directive is encountered within the dynamic extent of a parallel region, its behaviour will be similar to the non-orphaned case
- ◆ When an orphaned worksharing or synchronization directive is encountered in the sequential part of the program (outside the dynamic extent of any parallel region), it will be executed by the master thread only. In effect, the directive will be ignored

Step 1: "Outlining"




```
for (i=0; i<n; i++) /* Parallel loop */
{
  (void) FuncPar(i,m,c,...)
}
```

Still a sequential program
Should behave identically
Easy to test for correctness
But, parallel by design

```
void FuncPar(i,m,c,...)
{
  float a, b; /* Private data */
  int j;
  a = ...
  b = ... a ..
  c[i] = ....
  .....
  for (j=0; j<m; j++)
  {
    <a lot more code in this loop>
  }
  .....
}
```

Parallelizing bulky loops



```
for (i=0; i<n; i++) /* Parallel loop */
{
  a = ...
  b = ... a ..
  c[i] = ....
  .....
  for (j=0; j<m; j++)
  {
    <a lot more code in this loop>
  }
  .....
}
```


Step 2: Parallelize

```
#pragma omp parallel for private(i) shared(m,c,..)
```


```
for (i=0; i<n; i++) /* Parallel loop */
{
  (void) FuncPar(i,m,c,...)
} /*-- End of parallel for --*/
```

Minimal scoping required
Less error prone

```
void FuncPar(i,m,c,...)
{
  float a, b; /* Private data */
  int j;
  a = ...
  b = ... a ..
  c[i] = ....
  .....
  for (j=0; j<m; j++)
  {
    <a lot more code in this loop>
  }
  .....
}
```



Synchronization Controls



Barrier/2


We need to have updated all of a[] first, before using a[]

```
for (i=0; i < N; i++)
  a[i] = b[i] + c[i];
```

wait !
barrier

```
for (i=0; i < N; i++)
  d[i] = a[i] + b[i];
```

All threads wait at the barrier point and only continue when all threads have reached the barrier point



Barrier/1


Suppose we run each of these two loops in parallel over i:

```
for (i=0; i < N; i++)
  a[i] = b[i] + c[i];
```


```
for (i=0; i < N; i++)
  d[i] = a[i] + b[i];
```

This may give us a wrong answer (one day)

Why ?



Barrier/3

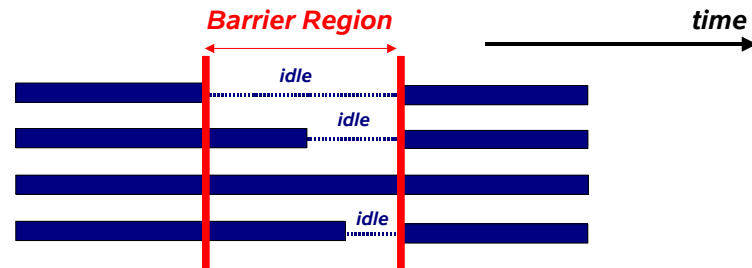


Each thread waits until all others have reached this point:

```
#pragma omp barrier
```


```
!$omp barrier
```

When to use barriers ?




- When data is updated asynchronously and the data integrity is at risk
- Examples:
 - Between parts in the code that read and write the same section of memory
 - After one timestep/iteration in a solver
- Unfortunately, barriers tend to be expensive and also may not scale to a large number of processors
- Therefore, use them with care


Critical region/2



- Useful to avoid a race condition, or to perform I/O (but which still will have random order)
- Be aware that your parallel computation may be serialized and so this could introduce a scalability bottleneck (Amdahl's law)

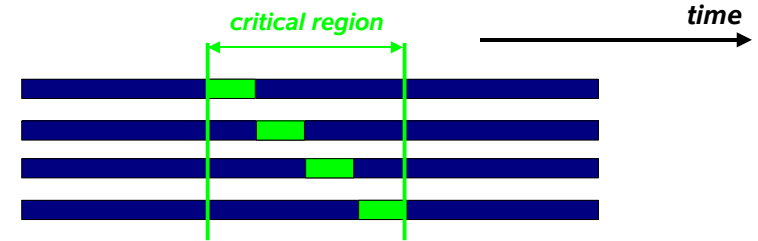

Critical region/1



If sum is a shared variable, this loop can not be run in parallel

```
for (i=0; i < N; i++){
    .....
    sum += a[i];
    .....
}
```


We can use a critical region for this:

```
for (i=0; i < N; i++){
    .....
    sum += a[i];
    .....
}
```

one at a time can proceed

next in line, please

Critical region/3



All threads execute the code, but only one at a time:

```
#pragma omp critical [(name)]
{<code-block>}
```

```
!$omp critical [(name)]
<code-block>
!$omp end critical [(name)]
```

There is no implied barrier on entry or exit !

```
#pragma omp atomic
<statement>
```


```
!$omp atomic
<statement>
```

This is a lightweight, special form of a critical section

```
#pragma omp atomic
a[indx[i]] += b[i];
```

Single processor region/1

This construct is ideally suited for I/O or initialization



```
for (i=0; i < N; i++)
{
    .....
    "read a[0..N-1]";
    .....
}
```

Serial

"declare A to be shared"


```
#pragma omp parallel for
for (i=0; i < N; i++)
{
    .....
    "read a[0..N-1]";
    .....
}
```

Parallel

May have to insert a barrier here

SINGLE and MASTER construct

Only one thread in the team executes the code enclosed



```
#pragma omp single [clause[,] clause] ...
{
    <code-block>
}
```

```
!$omp single [clause[,] clause] ...
    <code-block>
!$omp end single [nowait]
```

Only the master thread executes the code block:



```
#pragma omp master
{ <code-block> }
```

```
!$omp master
    <code-block>
!$omp end master
```

There is no implied barrier on entry or exit !


Single processor region/2

- Usually, there is a barrier needed after this region
- Might therefore be a scalability bottleneck (Amdahl's law)

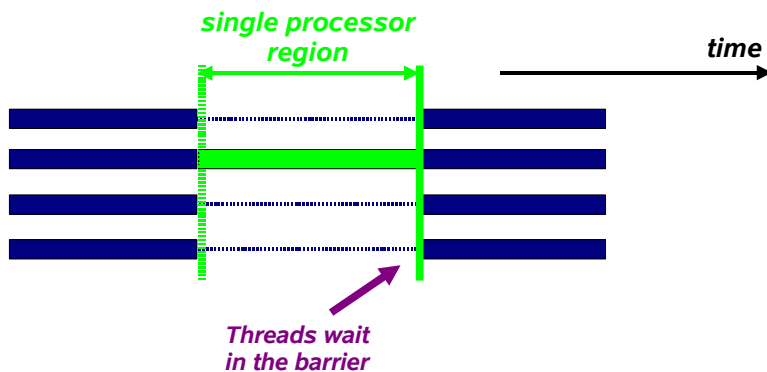

More synchronization directives

The enclosed block of code is executed in the order in which iterations would be executed sequentially:



```
#pragma omp ordered
{ <code-block> }
```

```
!$omp ordered
    <code-block>
!$omp end ordered
```


Expensive !

Ensure that all threads in a team have a consistent view of certain objects in memory:


```
#pragma omp flush [(list)]
```

```
!$omp flush [(list)]
```

In the absence of a list, all visible variables are flushed




OpenMP Environment Variables



OpenMP and Global Data

OpenMP environment variables



OpenMP environment variable	Default for Sun OpenMP
<code>OMP_NUM_THREADS n</code>	1
<code>OMP_SCHEDULE "schedule,[chunk]"</code>	static, "N/P" (1)
<code>OMP_DYNAMIC { TRUE FALSE }</code>	TRUE (2)
<code>OMP_NESTED { TRUE FALSE }</code>	FALSE (3)


(1) The chunk size approximately equals the number of iterations (N) divided by the number of threads (P)

(2) The number of threads will be limited to the number of on-line processors in the system. This can be changed by setting `OMP_DYNAMIC` to `FALSE`.

(3) Multi-threaded execution of inner parallel regions in nested parallel regions is supported as of Sun Studio 10

Note: The names are in uppercase, the values are case insensitive

Global data - example



```

.....
include "global.h"
.....
!$omp parallel private(j)
do j = 1, n
    call suba(j)
end do
!$omp end do
!$omp end parallel
.....

```

file global.h

```



common /work/a(m,n),b(m)

subroutine suba(j)
.....
include "global.h"
.....
do i = 1, m
    b(i) = j
end do
do i = 1, m
    a(i,j) = func_call(b(i))
end do
return
end



```

Race condition !

Global data - race condition

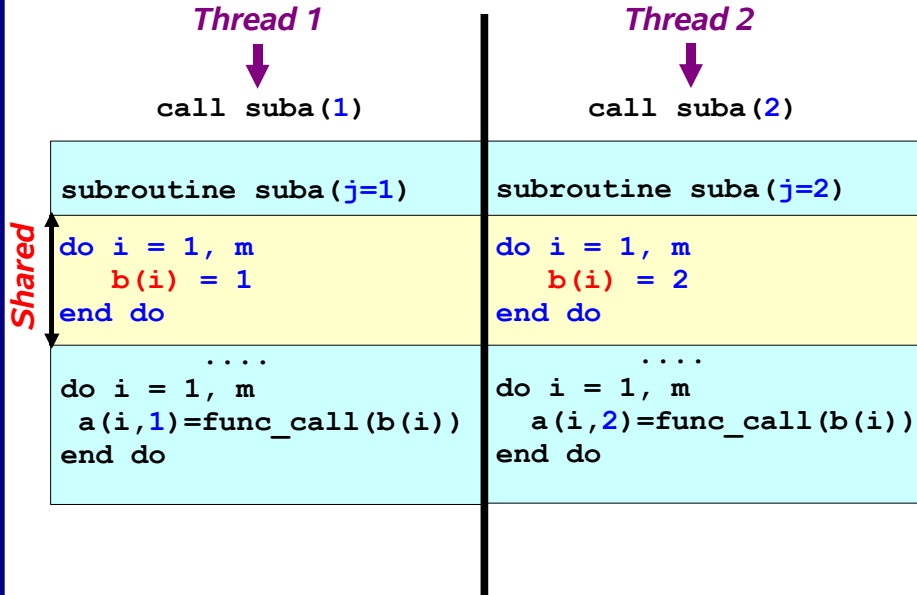



Example - solution 2

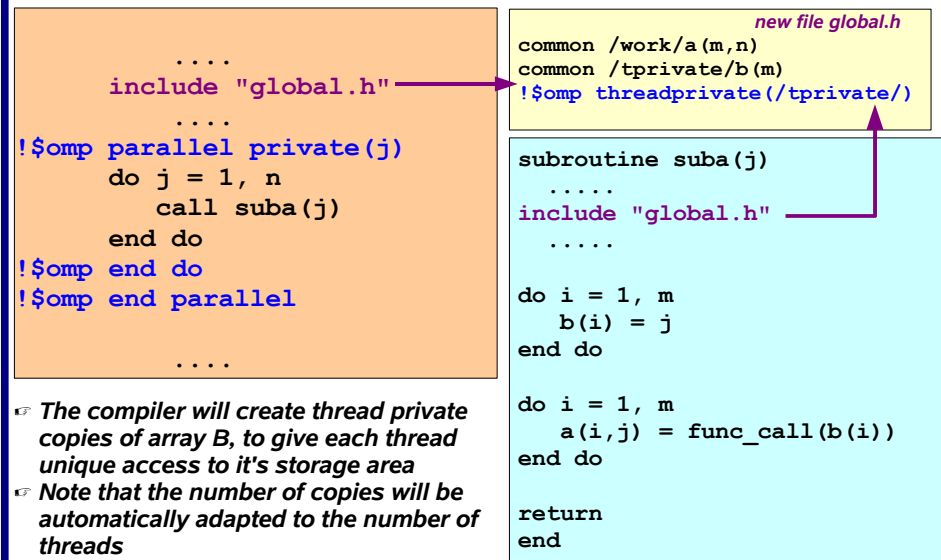


- ☞ The compiler will create thread private copies of array B, to give each thread unique access to it's storage area
- ☞ Note that the number of copies will be automatically adapted to the number of threads

Example - solution

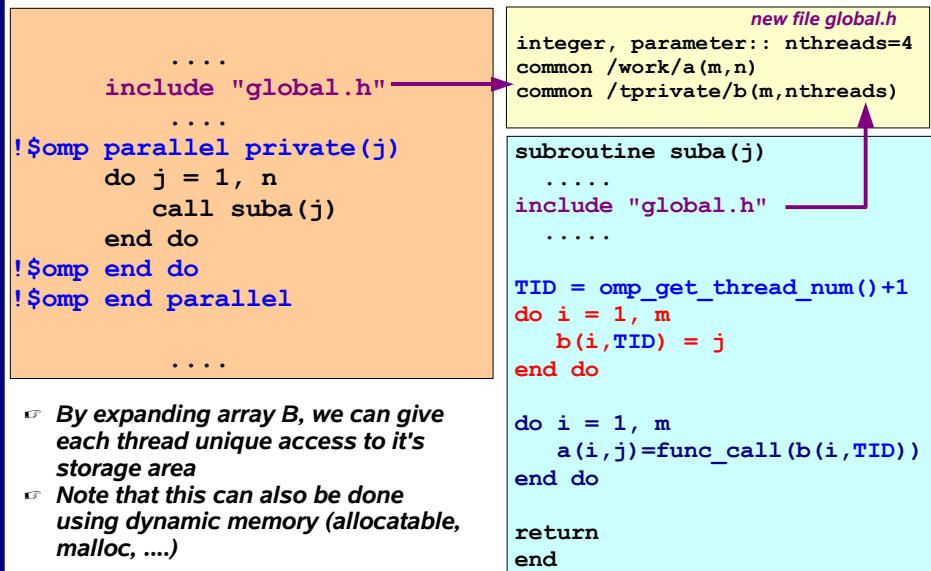

- ☞ By expanding array B, we can give each thread unique access to it's storage area
- ☞ Note that this can also be done using dynamic memory (allocatable, malloc,)

About global data



- ☐ Global data is shared and requires special care
- ☐ A problem may arise in case multiple threads access the same memory section simultaneously:
 - Read-only data is no problem
 - Updates have to be checked for race conditions
- ☐ It is your responsibility to deal with this situation
- ☐ In general one can do the following:
 - Split the global data into a part that is accessed in serial parts only and a part that is accessed in parallel
 - Manually create thread private copies of the latter
 - Use the thread ID to access these private copies
- ☐ Alternative: Use OpenMP's threadprivate construct

The threadprivate construct

OpenMP's threadprivate directive

```
!$omp threadprivate (/cb/ [, /cb/] ...)
```

```
#pragma omp threadprivate (list)
```

- Thread private copies of the designated global variables and common blocks will be made
- Several restrictions and rules apply when doing this:
 - The number of threads has to remain the same for all the parallel regions (i.e. no dynamic threads)
 - ✓ Sun implementation supports changing the number of threads
 - Initial data is undefined, unless copyin is used
 -
- Check the documentation when using threadprivate !

OpenMP Runtime Functions

The copyin clause

copyin (list)

- ✓ Applies to THREADPRIVATE common blocks only
- ✓ At the start of the parallel region, data of the master thread is copied to the thread private copies

Example:

```
common /cblock/velocity
common /fields/xfield, yfield, zfield

! create thread private common blocks


!$omp threadprivate (/cblock/, /fields/)

!$omp parallel      &
!$omp default (private) &
!$omp copyin ( /cblock/, zfield )
```

OpenMP runtime environment


- OpenMP provides various user-callable functions
 - ▶ To control and query the parallel environment
 - ▶ General purpose semaphore/lock routines
 - ✓ Nested locks are supported, but will not be covered here
- The runtime functions take precedence over the corresponding environment variables
- Recommended to use under control of an #ifdef for _OPENMP (C/C++) or conditional compilation (Fortran)
- C/C++ programs need to include <omp.h>
- Fortran: may want to use "USE omp_lib"

OpenMP runtime library




- *OpenMP Fortran library routines are external functions*
- *Their names start with **OMP_** but usually have an integer or logical return type*
- *Therefore these functions must be declared explicitly*
- *On Sun systems the following features are available:*
 - *USE omp_lib*
 - *INCLUDE 'omp_lib.h'*
 - *#include "omp_lib.h" (preprocessor directive)*
- *Compilation with **-Xlist** will also report any type mismatches*
- *The **f95 -XlistMP** option for more extensive checking can be used as well*

OpenMP locking routines




- *Locks provide greater flexibility over critical sections and atomic updates:*
 - *Possible to implement asynchronous behaviour*
 - *Not block structured*
- *The so-called lock variable, is a special variable:*
 - *Fortran: type **INTEGER** and of a **KIND** large enough to hold an address*
 - *C/C++: type **omp_lock_t** and **omp_nest_lock_t** for nested locks*
- *Lock variables should be manipulated through the API only*
- *It is illegal, and behaviour is undefined, in case a lock variable is used without the appropriate initialization*

Runtime library overview



Name	Functionality
<code>omp_set_num_threads</code>	Set number of threads
<code>omp_get_num_threads</code>	Return number of threads in team
<code>omp_get_max_threads</code>	Return maximum number of threads
<code>omp_get_thread_num</code>	Get thread ID
<code>omp_get_num_procs</code>	Return maximum number of processors
<code>omp_in_parallel</code>	Check whether in parallel region
<code>omp_set_dynamic</code>	Activate dynamic thread adjustment <i>(but implementation is free to ignore this)</i>
<code>omp_get_dynamic</code>	Check for dynamic thread adjustment
<code>omp_set_nested</code>	Activate nested parallelism <i>(but implementation is free ignore this)</i>
<code>omp_get_nested</code>	Check for nested parallelism
<code>omp_get_wtime</code>	Returns wall clock time
<code>omp_get_wtick</code>	Number of seconds between clock ticks

Nested locking



- *Simple locks: may not be locked if already in a locked state*
- *Nestable locks: may be locked multiple times by the same thread before being unlocked*
- *In the remainder, we will discuss simple locks only*
- *The interface for functions dealing with nested locks is similar (but using nestable lock variables):*



Simple locks

```
omp_init_lock
omp_destroy_lock
omp_set_lock
omp_unset_lock
omp_test_lock
```

Nestable locks


```
omp_init_nest_lock
omp_destroy_nest_lock
omp_set_nest_lock
omp_unset_nest_lock
omp_test_nest_lock
```

OpenMP locking example

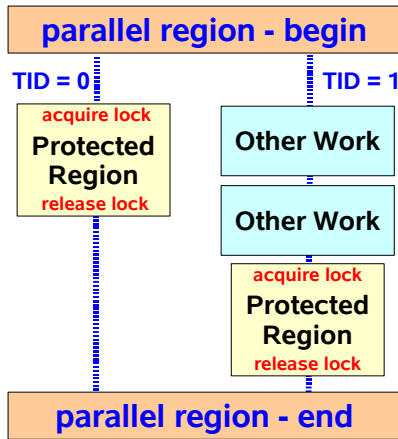

- ◆ The protected region contains the update of a shared variable
- ◆ One thread will acquire the lock and perform the update
- ◆ Meanwhile, the other thread will do some other work
- ◆ When the lock is released again, the other thread will perform the update

Example output for 2 threads




```
TID: 1 at 09:07:27 => entered parallel region
TID: 1 at 09:07:27 => done with WAIT loop and has the lock
TID: 1 at 09:07:27 => ready to do the parallel work
TID: 1 at 09:07:27 => this will take about 18 seconds
TID: 0 at 09:07:27 => entered parallel region
TID: 0 at 09:07:27 => WAIT for lock - will do something else for 5 seconds
TID: 0 at 09:07:32 => WAIT for lock - will do something else for 5 seconds
TID: 0 at 09:07:37 => WAIT for lock - will do something else for 5 seconds
TID: 0 at 09:07:42 => WAIT for lock - will do something else for 5 seconds
TID: 1 at 09:07:45 => done with my work
TID: 1 at 09:07:45 => done with work loop - released the lock
TID: 1 at 09:07:45 => ready to leave the parallel region
TID: 0 at 09:07:47 => done with WAIT loop and has the lock
TID: 0 at 09:07:47 => ready to do the parallel work
TID: 0 at 09:07:47 => this will take about 18 seconds
TID: 0 at 09:08:05 => done with my work
TID: 0 at 09:08:05 => done with work loop - released the lock
TID: 0 at 09:08:05 => ready to leave the parallel region
Done at 09:08:05 - value of SUM is 1100
```

Used to check the answer

Note: program has been instrumented to get this information

Locking example - the code



```
Program Locks
....
Call omp_init_lock (LCK)

!$omp parallel shared(SUM,LCK) private(TID)

    TID = omp_get_thread_num()

    Do While ( omp_test_lock (LCK) .EQV. .FALSE. )
        Call Do_Something_Else(TID)
    End Do

    Call Do_Work (SUM,TID)

    Call omp_unset_lock (LCK)

!$omp end parallel

Call omp_destroy_lock (LCK)

Stop
End
```


Initialize lock variable

Check availability of lock (will also set the lock)


Release lock again

Remove lock association


Wrap-Up



Summary



- ❑ *OpenMP provides for a compact, but yet powerful, programming model for shared memory programming*
- ❑ *OpenMP supports Fortran, C and C++*
- ❑ *OpenMP programs are portable to a wide range of systems*
- ❑ *An OpenMP program can be written such that the sequential version is still “built-in”*



Thank You !

(shameless plug: come to our OMPlab talk to hear more about the Sun OpenMP environment and features)